



密封条
Seal strip

时尚家居生活必备产品

门框密封条又称消音条也称防震条其最主要功能是让门片与门框接触时降低关门声音、减少灰尘进入门内及延长寿命，保护漆的寿命。广泛适用于家庭、宾馆、医院、商务楼、洁净工程、大型商场等领或，主要起到防尘、挡风、挡光、隔音、隔烟、隔温、挡虫、减少震动等作用。

Fashion essential household products

Doorframes seal Also called Deafen strip Name Quakeproof strip Its most main function is have the gate piece and gate frame contact time falls Lowly closes the sound, and reduced dust enters in the gate and extends Long life, Protective paint life. Which is Widely suitable for the family, the hotel, the hospital, the business building, the pure project, the large-scale market and so on lead, which is main to separate the dust, keep out the wind, separate the light, separate the sound, separate the smoke, separates warm, keep off insect, reduce vibration and so on function.

六大强大功能 Six Functional



隔灰尘、冷风



隔暖气外溢



隔冷气外溢



隔蚊虫



隔声音



隔灯光

特别建议：与门底密封条一起使用时，更可节约能源及防冷、暖气外流。

With door bottom seal used together, may save the energy and separate the cold and warm air overflow.

嵌入式门框密封条

Embedded door seal

主要适用范围:

适用各种室内门上

安装方式:

直接在门阻(框)上开个的凹槽, 将密封条按插入槽即可

产品特性:

减少关开门的撞击声, 防震
防止灰尘、臭气、蚊虫的透入
延长门的寿命, 减小噪音

Main application:

suitable for all kinds of indoor

Installation method:

directly in the door resistance (box) on the opening of the groove, the sealing strip directly into the slot can be

Product features:


To reduce the impact of the door open shock
Gum to prevent dust, odor, mosquito penetration
Extend the life of the door to reduce noise

密封条 -D 型

Seal strip-type D



安装效果图 Installation diagram

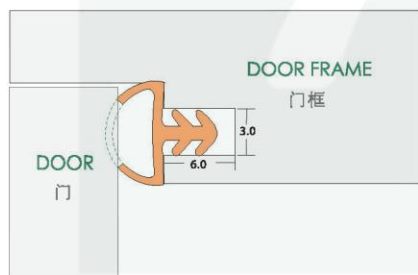


标准颜色 Standard color

- 咖啡色 dark brown
- 浅土黄色 shallow yellow
- 本白色 white
- 红樱桃色 red cherry color

以实物为准
Take the object as the criterion

剖面图 Profile	型号 Item NO.	规格 Spec W*H*F	适用门缝 Applicable gap	适用的档口 Suitable stall	开槽尺寸 Slot size W*D	材质 Material	包装 米/件 Packing M/box
	Q1-36	7.8*3.9*3.7	2-3	8 以上	3*6	PVC 橡塑	300
	Q1-06	8.5*5*3.7	2-4	8.5 以上	3*6	PVC 橡塑	300
	Q1-24	8.5*7*3.8	3-6	8.5 以上	3*6	PVC 橡塑	200
	Q1-38	9*4.5*3.7	2-3	9 以上	3*6	PVC 橡塑	300
	Q1-38-100	10*5*3.7	2.5-4	10 以上	3*6	PVC 橡塑	250
	Q1-10	11.8*5.8*3.7	3-5	12 以上	3*6	PVC 橡塑	200
	Q1-60	10*9*3.7	5-8	10 以上	3*6	PVC 橡塑	150
	Q1-74	9*5*4	3-4	9 以上	3.2*6	PVC 橡塑	300
	Q1-46E	8*3.5*3.7	2-3	8 以上	3*6	TPE 弹性体	300
	Q1-40E	8.5*4.2*3.7	2-3	8.5 以上	3*6	TPE 弹性体	300
	Q1-84E	10*5*3.7	2.5-4	10 以上	3*6	TPE 弹性体	250
	Q1-72E	11.8*5.5*3.7	3-4	12 以上	3*6	TPE 弹性体	200
	Q1-106	8.5*5*3.7	3-4	8.5 以上	3*6	PVC 软硬共挤	2.44M/R

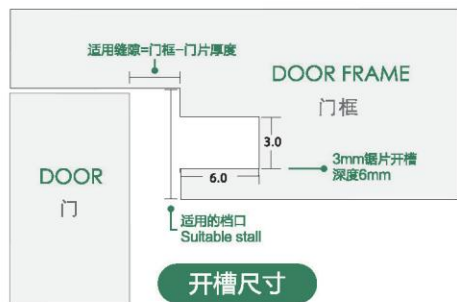


提示: 产品的外型、尺寸、颜色可根据客户需要定做
建议: 与门底密封条一起使用, 更可节约能源及防冷、暖气外流


Special note: product appearance, size, color can be customized according to customer needs
Note: if the Door bottom seal is used together with the Doorframe seal, may save the energy and separate

密封条 - 房型


Seal strip-house type

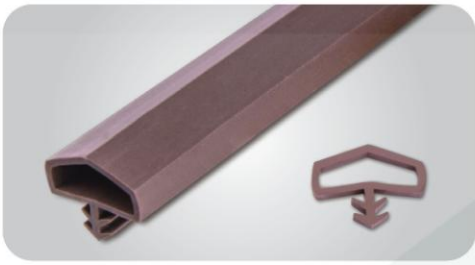

安装效果图 Installation diagram

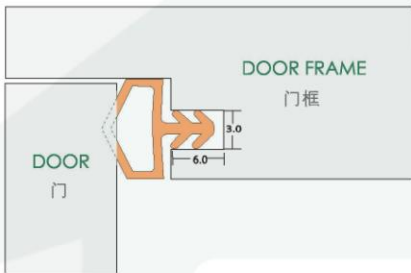

安装效果图 Installation diagram

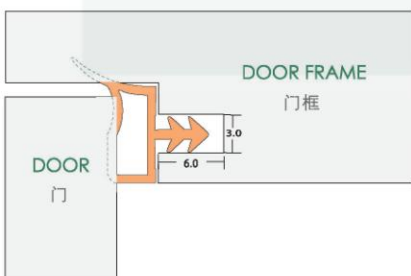

剖面图 Profile	型号 Item NO.	规格 Spec W*H*F	适用门缝 Applicable gap	适用的档口 Suitable stall	开槽尺寸 Slot size W*D	材质 Material	包装 米/件 Packing M/box
	Q1-13	10*4*3.7	2.5-3	10 以上	3*6	PVC 橡塑	250
	HOT 畅销品 Q1-25-100	10*5*3.7	2.5-4	10 以上	3*6	PVC 橡塑	250
	HOT 畅销品 Q1-25-120	12*6*3.7	3-5	12 以上	3*6	PVC 橡塑	200
	Q1-22	10*6.5*3.7	3-5.5	10 以上	3*6	PVC 橡塑	200
	Q1-19	11*6*4.7	3-5	11 以上	4*6	PVC 橡塑	200
	Q1-14	12*5*3.7	2.5-4	12 以上	3*6	PVC 橡塑	200
	Q1-17	12*8*4	4-7	12 以上	3.2*6	PVC 橡塑	150
	HOT 畅销品 Q1-47E	10*5*3.7	2.5-4	10 以上	3*6	TPE 弹性体	250
	Q1-73	15*7*3.7	3-6	15 以上	3*6	PVC 橡塑	150
	HOT 畅销品 Q1-49E-120	12*6*3.7	3-5	12 以上	3*6	TPE 弹性体	150
	Q1-JH01	20*7*3.7	4-6	20 以上	3*6	PVC 橡塑	150
	Q1-112	12*6*3.7	4-5	12 以上	3*6	TPE 弹性体	150
	HOT 畅销品 Q1-RC01	10*4.5*3.7	3-4	10 以上	3*6	TPE 弹性体	150
	客户专用 Q1-ST01	6.7*5.8*3.7	3-5	7 以上	3*6	rubber co-extrusion 橡塑软硬	210 2.44M/R
	Q1-111	10*4.8*3.7	3-4	10 以上	3*6	TPE	150

提示: 产品的外型、尺寸、颜色可根据客户需要定做
建议: 与门底密封条一起使用, 更可节约能源及防冷、暖气外流

Special note: product appearance, size, color can be customized according to customer needs
Note: if the Door bottom seal is used together with the Doorframe seal, may save the energy and separate




单位: mm

密封条 - 侧边型

Seal strip-Side type



安装效果图 Installation diagram

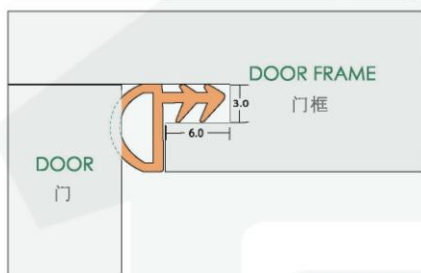

剖面图 Profile	型号 Item NO.	规格 Spec W*H*F	适用门缝 Applicable gap	适用的档口 Suitable stall	开槽尺寸 Slot size W*D	材质 Material	包装米/件 Packing M/box
	HOT 畅销品 Q1-37	8.5*4.2*3.7	2-3	9 以上	3*6	PVC 橡塑	300
	Q1-53	8.8*4.4*3.6	3-4	9 以上	3*6	橡塑共挤 Rubber co-extrusion	300
	Q1-55	9.5*6.6*3.6	3-5	10 以上	3*6	橡塑共挤 Rubber co-extrusion	300
	Q1-LG01	12*5.5*3.7	3-5	12 以上	3*6	PVC 橡塑	200


单位: mm

密封条 - 其他类

Seal strip-Other class



安装效果图 Installation diagram

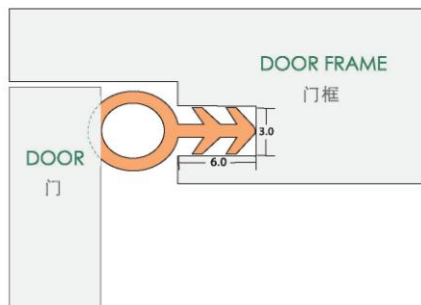

剖面图 Profile	型号 Item NO.	规格 Spec W*H*F	适用门缝 Applicable gap	适用的档口 Suitable stall	开槽尺寸 Slot size W*D	材质 Material	包装米/件 Packing M/box
	Q1-09	5.5*5.5*3.7	3-4.5	5.5 以上	3*6	PVC 橡塑	300
	Q1-71	7*7*4.3	4-6	7 以上	4*6	PVC 橡塑	250
	Q1-96	7*7*2.9	4-6	7 以上	2.5*6	PVC 橡塑	250
	Q1-30E	8.5*5*3.7	3-4	8.5 以上	3*6	PVC 橡塑	200
	Q1-23	9.8*2*3.7	2	12 以上	3*6	PVC 橡塑	300
	Q1-62	20*2*3.7	2	20 以上	3*6	PVC 橡塑	200



提示: 产品的外型、尺寸、颜色可根据客户需要定做

Special note: product appearance, size, color can be customized according to customer needs

粘贴式密封条

Paste sealing strip

主要适用范围:

适用各种室内门上

安装方式:

自带胶, 直接粘贴即可, 背胶采用进口台湾 3M 或台、德技术合作之高度压敏胶

产品特性:

减少开关门的撞击声, 防震防止灰尘、臭气、蚊虫的透入延长门的寿命, 减小噪音

Main application:

Suitable for all kinds of indoor

Installation method:

Installation method: 1 bring glue, paste directly, Beijiao imported Taiwan 3M or Taiwan, German technical cooperation of high pressure sensitive adhesive

Product features:

To reduce the impact of the door open shock Gum to prevent dust, odor, mosquito penetration Extend the life of the door to reduce noise

密封条 - 粘贴式 Seal strip - Paste type



此密封条可一分为二, 撕开单独使用
This seal can be split in two and torn apart for use alone

安装效果图 Installation diagram



剖面图 Profile	型号 Item NO.	规格 Spec W*H*F	适用门缝 Applicable gap	适用的档口 Suitable stall	材质 Material	包装 米/件 Packing M/box
	Q1-11	9*3.5	2-3	9 以上	PVC	500
	Q1-12	11.8*5.5	2-4	12 以上	PVC 橡塑 阻燃	400
	HOT 畅销品 Q1-26	9*5	3-4	9 以上	橡塑共挤 Rubber co-extrusion	600
	HOT 畅销品 Q1-65	12*6	3-5	12 以上	PVC 橡塑 阻燃	200
	Q1-HH01	12*8	5-7	12 以上	PVC	200
	Q1-86	12*5	2-3	12 以上	橡塑	300
	Q1-64	10*2	2	10 以上	橡塑	500
	Q1-67	9*1.5	1.5	9 以上	橡塑	500
	HOT 畅销品 Q1-79 踢脚线专用	6.6*2	2	6.6 以上	橡塑共挤 Rubber co-extrusion	1600
	Q1-99	16*2	2	16 以上	橡塑	350

温馨提示

为获得更好的黏贴效果, 密封条必须粘贴在光滑、清洁、干燥的表面

Tips: to achieve better adhesion effect, the sealing strip must be pasted on a smooth, clean, surface dry surface



背胶 Back Glue

现已采用软硬共挤的技术使产品的粘性更牢固
Now the use of soft and hard co extrusion technology to make the product more adhesive



单位: mm

BP 线条 - 玻璃专用

BP line - glass special




剖面图 Profile	型号 Item NO.	规格 Spce W*H	适用玻璃厚度 Applicable glass thickness	材质 Material	包装米/件 Packing M/Box
	HOT畅销品 Q1-58	12.3*5.9	各种厚度 Various thickness	PVC 橡塑	300
	HOT畅销品 Q1-29	18.5*10	各种厚度 Various thickness	PVC 发泡 PVC foam	140 2.1M/R
	Q1-113	16.5*10	各种厚度 Various thickness	PVC 发泡 PVC foam	154 2.1M/R
	Q1-114	13.5*10	各种厚度 Various thickness	PVC 发泡 PVC foam	182 2.1M/R

密封条 Seal

密封条 - 金属门专用

Seal strip-metal door special

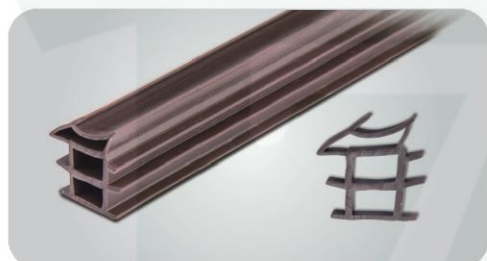

单位: mm

剖面图 Profile	型号 Item NO.	规格 Spce W*H	材质 Material
	Q1-HY01	10*6	橡塑
	Q1-110	13*4	TPE 共挤 TPE co-extrusion
	Q1-TH01	40*3	PVC
	Q1-ALD	21.5*1.6	橡塑共挤 Rubber co-extrusion
	D1-B0385	11*8	PVC TPE
	Q1-87	3.8*4	橡塑共挤 Rubber co-extrusion
	Q1-88	7*4	TPE 弹性体
	Q1-92	9.3*6.2	PVC 橡塑

剖面图 Profile	型号 Item NO.	规格 Spce W*H	材质 Material
	Q1-98	6*8	橡塑共挤 Rubber co-extrusion
	Q1-90	6.5*4	橡塑共挤 Rubber co-extrusion
	Q1-JY01	19.2*9	橡塑共挤 Rubber co-extrusion
	Q1-JY03	18.4*7	橡塑共挤 Rubber co-extrusion
	Q1-WL01	7.5*5.5	橡塑共挤 Rubber co-extrusion
	Q1-XL01	12*4.5	橡塑共挤 Rubber co-extrusion
	Q1-GML01	8.5*3.2	橡塑共挤 Rubber co-extrusion
	Q1-XDL02	4.5*4.5	橡塑共挤 Rubber co-extrusion



提示: 产品的外型、尺寸、颜色可根据客户需要定做

Special note: product appearance, size, color can be customized according to customer needs